

WIRING INSTRUCTIONS

TITLE

CIRCULAR SAW


BULLETIN

MILWAUKEE ELECTRIC TOOL CORP.

13135 WEST LISBON RD. BROOKFIELD, WIS

DATE
Nov. '81

58-01-0750

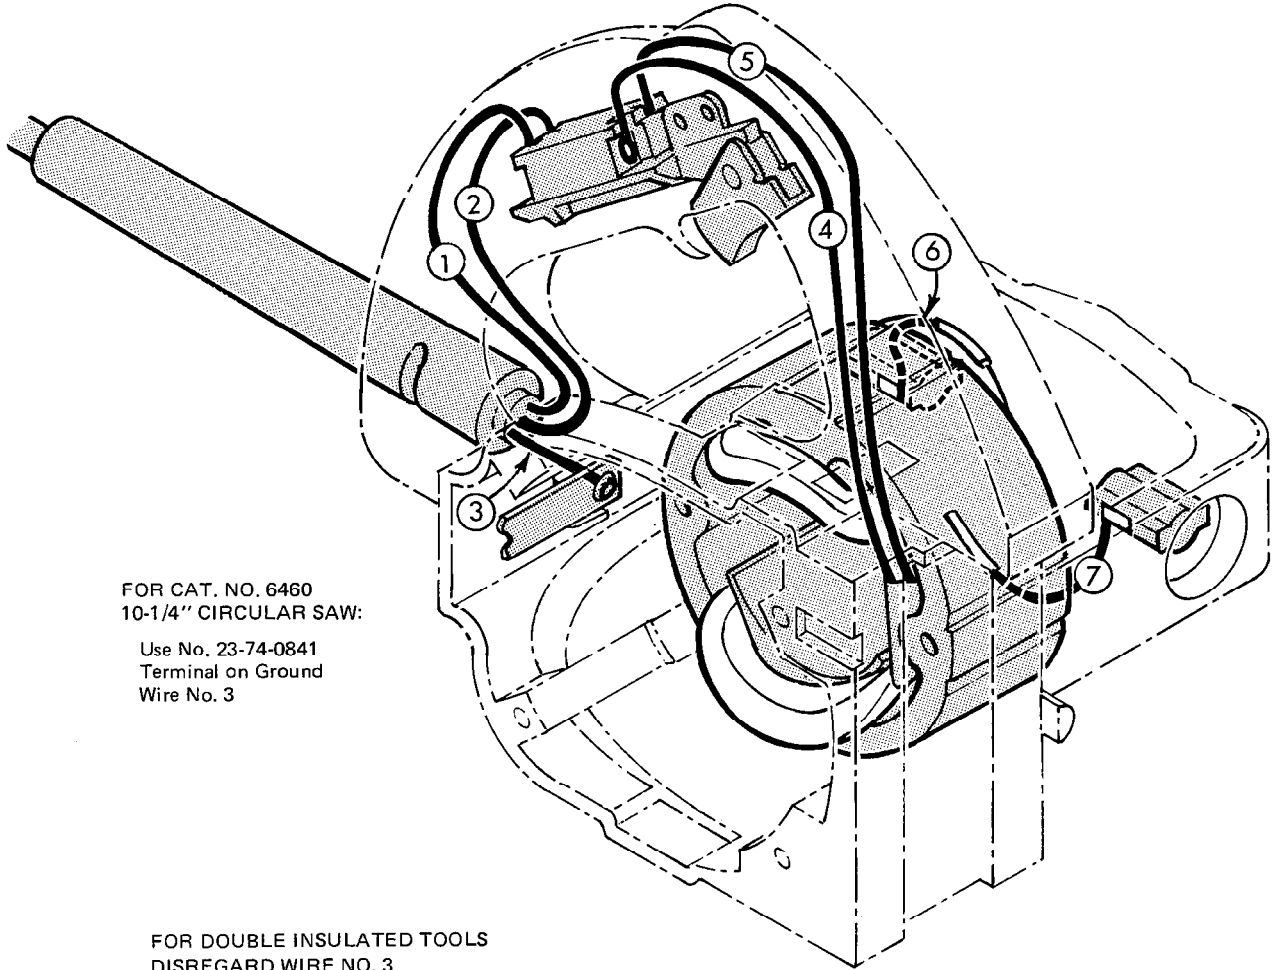

FOR CAT. NO. 6460
10-1/4" CIRCULAR SAW:

Use No. 23-74-0841
Terminal on Ground
Wire No. 3

FOR DOUBLE INSULATED TOOLS
DISREGARD WIRE NO. 3

WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Gauge	Length	Terminals, Connectors and 1 or 2 End Wire Preparation.
1	White	Cord	4-3/4"	Strip 3/16" for T1
2	Black	Cord	4-3/4"	Strip 3/16" for T1
3	Green	Cord	2-3/8"	Strip 3/16" For T1
4	Yellow	Field	7-7/8"	Strip 3/16" for T1
5	Black	Field	7-7/8"	Strip 3/16" for T1
6	Yellow	Field	2-3/4"	Strip 1/4" for T2
7	Black	Field	2-3/4"	Strip 1/4" for T2

NOTE:

All leads must be held to $\pm 1/8"$.
All field leads to be measured from
and perpendicular to laminations.
All lead lengths are before stripping.

TERMINAL DESCRIPTION

Code	Part No.	Qty.
T1	23-74-0851	5
T2	22-44-0090	2

CONNECTOR DESCRIPTION

Code	Part No.	Qty.