


WIRING INSTRUCTIONS

TITLE **O.E.M. SAW MOTOR**

MILWAUKEE ELECTRIC TOOL CORP. 13135 WEST LISBON RD. BROOKFIELD, WIS. DATE
Mar. 2000

**BULLETIN
58-01-0751**

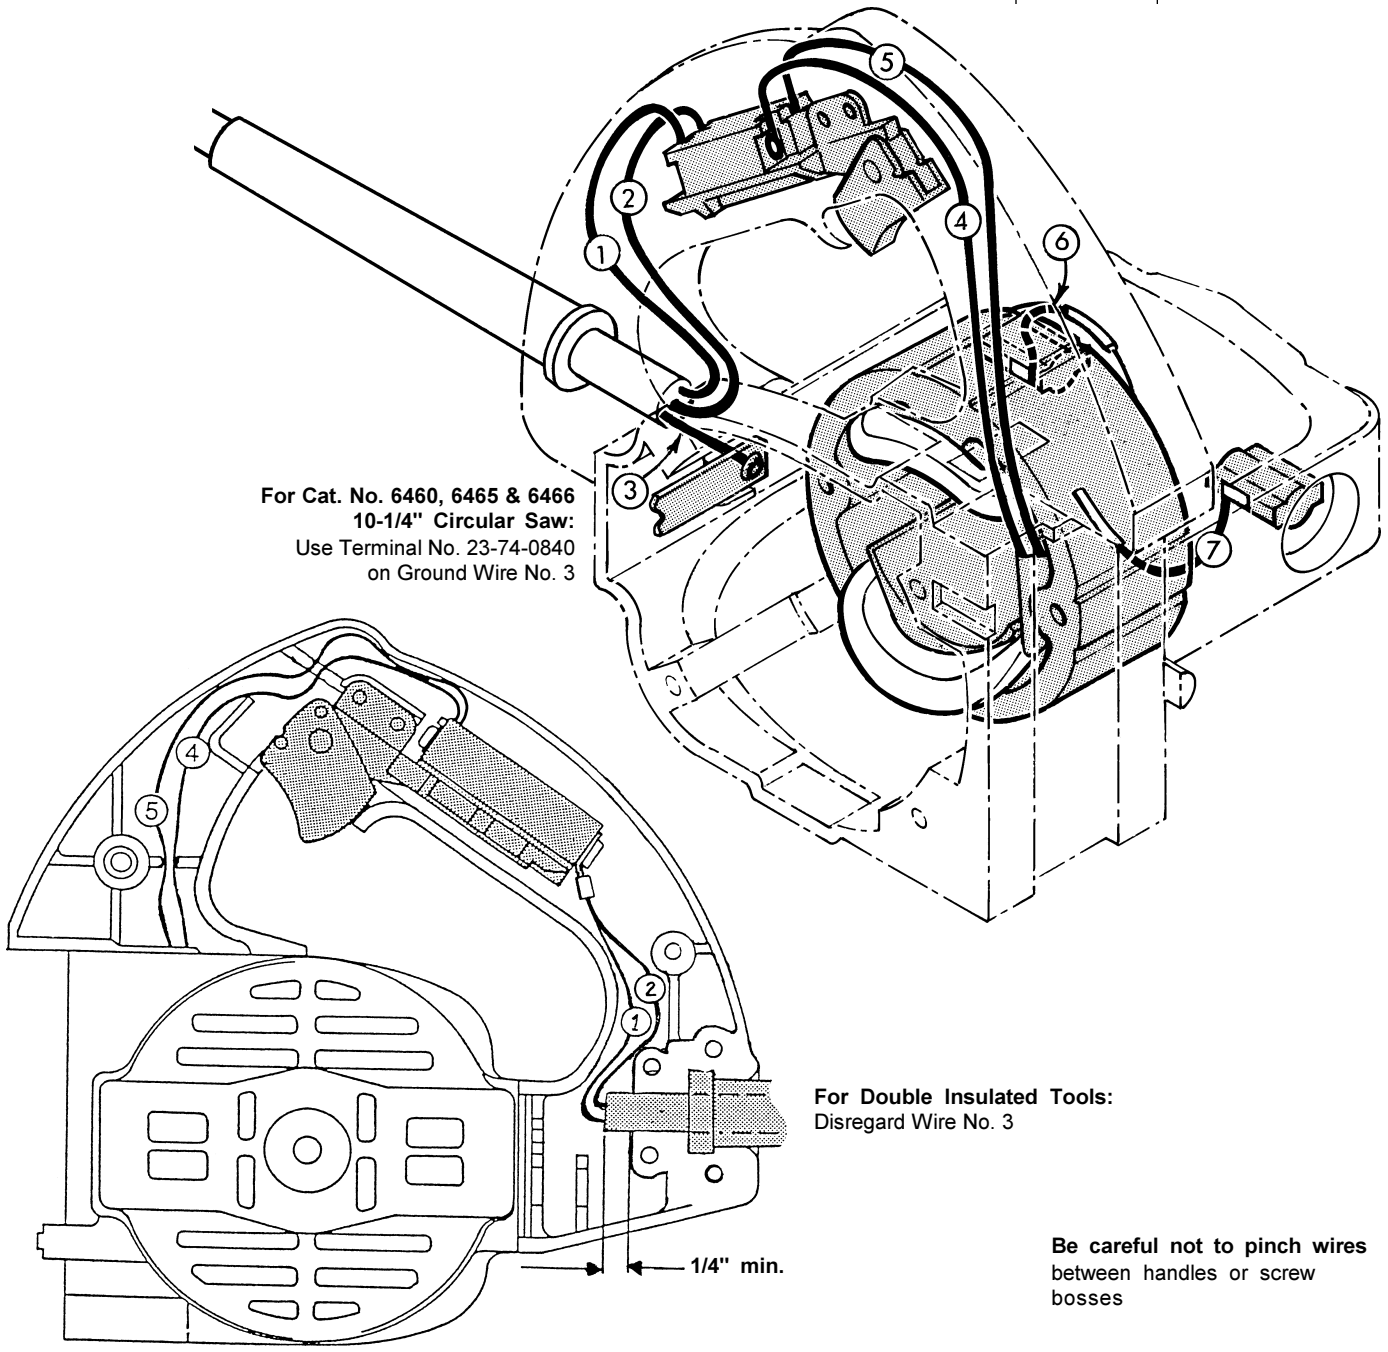

Be careful not to pinch wires
between handles or screw
bosses

NOTE:
All lead lengths are before stripping.
All field leads are to be measured from
and perpendicular to laminations.
All leads must be held to ± 1/8" unless
specified elsewhere.

WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Part No.	Gauge	Length	Terminals, Connectors and End Wire Preparation
1	White	Cord		4-3/4"	Strip 3/16" for T1
2	Black	Cord		4-3/4"	Strip 3/16" for T1
3	Green	Cord		2-3/8"	Strip 3/16" for T1
4	Yellow	Field		7-7/8"	Strip 3/16" for T1
5	Black	Field		7-7/8"	Strip 3/16" for T1
6	Yellow	Field		2-3/4"	Strip 1/4" for T2
7	Black	Field		2-3/4"	Strip 1/4" for T2

BULK LEAD WIRE - BULLETIN 58-01-0003

TERMINAL DESCRIPTION

Code	Part No.	Qty.
T1	23-74-0850	5
T2	22-44-0090	2