WIRING INSTRUCTIONS

TITLE LARGE REVERSING DRILLS (TRIPLE REDUCTION)

MILWAUKEE ELECTRIC TOOL CORP. 13135 WEST LISBON RD. BROOKFIELD, WIS.

Date Jan. '74

BULLETIN 58-01-0270

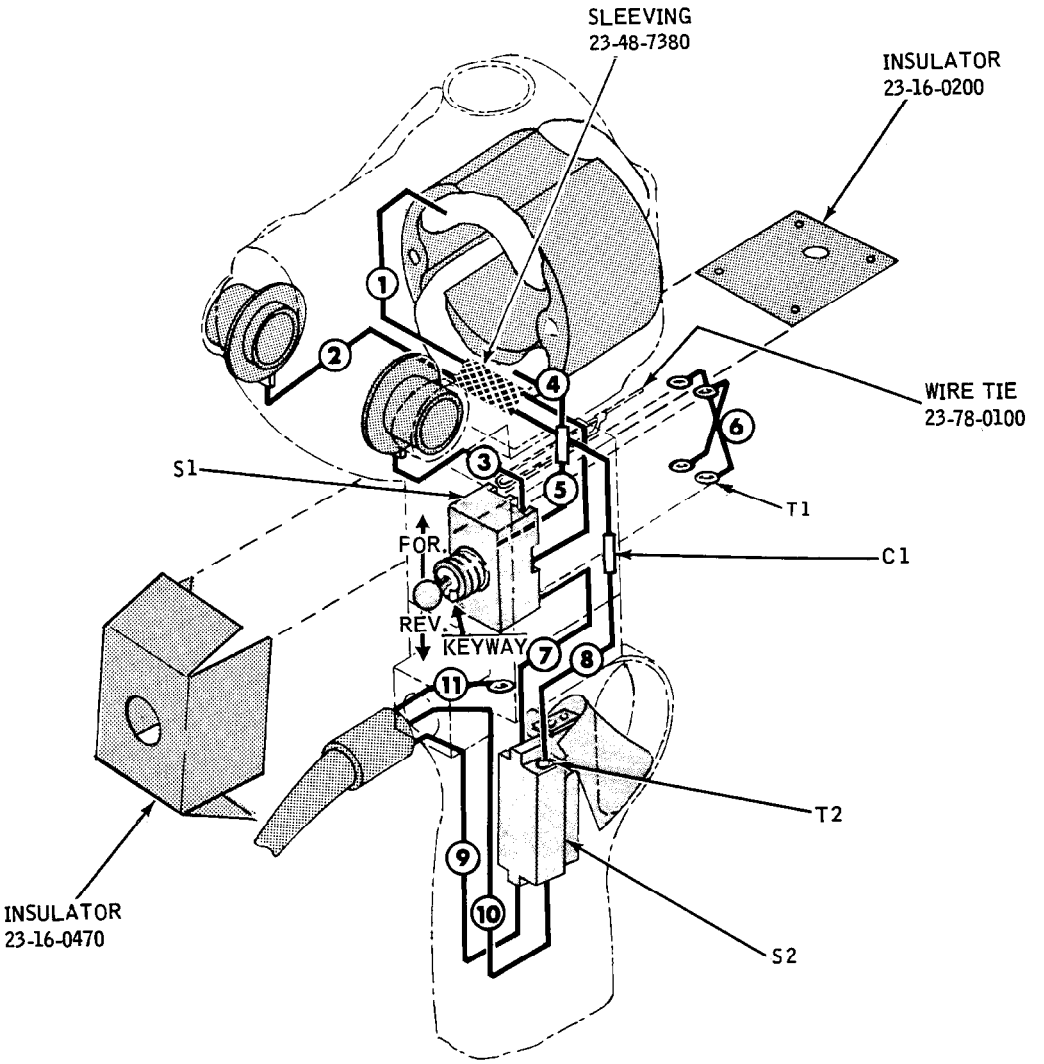

USE LOCK WASHERS UNDER ALL SWITCH TERMINALS.

NOTE:
ALL LEADS MUST BE HELD TO ± 1/8"
ALL FIELD LEADS TO BE MEASURED FROM AND PERPENDICULAR TO LAMINATIONS.
ALL LEAD LENGTHS ARE BEFORE STRIPPING.

WHERE TERMINAL AND CONNECTOR COMBINATIONS ARE SPECIFIED, SEE ELECTRICAL PARTS CHART FOR PART NO. AND QUANTITY AND DRAWING FOR ACTUAL HOOK-UP

WIRING SPECIFICATIONS

Wire Color	Wire No.	Ga.	Lgth. in.	Terminal T1	T2	T3	T4	Connector C1	C2	C3	C4	Wire Color	Wire No.	Ga.	Lgth. in.	Terminal T1	T2	T3	T4	Connector C1	C2	C3	C4
Black	1	Fld.	13	X								Yellow	7	16	6	X	X						
Red	2	16	11					X				Yellow	8	16	4		X						
												Black	9	Cord	4-1/2		X						
White	3	16	12	X								White	10	Cord	4-1/2		X						
Yellow	4	Fld.	6-1/2					X				Green	11	Cord	2	X							
Yellow	5	16	4-1/4	X																			
Black	6	16	2-1/2	X (2 WIRES-4 T1)																			

Electrical Parts

TERMINAL DESCRIPTION

Code	Part No.	Qnty.
T1	23-74-0050	9
T2	23-74-0330	4

CONNECTOR DESCRIPTION

Code	Part No.	Qnty.
C1	23-74-0360	2

SWITCH DESCRIPTION

Code	Part No.	Qnty.
S1	23-66-0340	1
S2	Refer to Parts List	1